

SKYLINE SERIES

The intelligent solar lighting solution specially designed for highways, roundabouts and special roads.



Energy self-sufficiency



0 energy cost




Anti-vandalism design



0 emissions to the atmosphere



Personalized study of needs

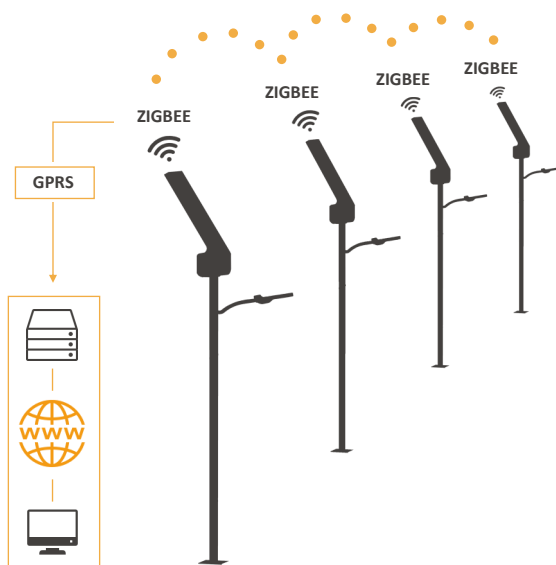

KENLOK INTELLIGENT CONTROL UNIT

- Light control algorithm for greater battery autonomy
- Factory custom lighting programming
- Energy resources optimization to maximize the durability of the system
- Voltage and temperature measurement system
- Automatic daylight saving time adjustment
- Total control of streetlight parameters

ilumek TELEMANAGEMENT SYSTEM

Online platform for the management and monitoring of the solar lamps.

- ✓ Customized system design
- ✓ Private server
- ✓ Warning / alarm system for operational issues
- ✓ Different access levels
- ✓ Data Export to Excel
- ✓ Remote diagnosis





FEATURES

LUMINAIRE

Type	LED
Power	14 - 80 W
Rated voltage	12 - 24 V
Efficiency	> 150 lm/W
Colour temp.	3000 - 4000 - 5700 K

SOLAR PANEL

Type	Monocrystalline / Polycrystalline
Power	100 - 280 Wp
Lifespan	More than 25 years

BATTERY

Type	VRLA (GEL or AGM)
Capacity	Up to 250 Ah
Discharge capacity	50%

COLUMN

Height	9 - 12 meters
Material	Hot dip galvanised steel
Corrosion resistance	> 15 years
Additional protections	Polyester powder coating Antigraffiti protection

HIGH EFFICIENCY LEDS



HIGH RESISTANCE TO THE CORRO-



SMART SOLUTION



MAXIMUM RELIABILITY



ekiona
solar lighting

Miramón Technology Park

Paseo Mikeletegi, 56

20009 · Donostia - San Sebastián

Spain

info@ekiona.com

www.ekiona.com

